

## TITLE:

Method and arrangement for control of direct current motor.

## TECHNICAL FIELD:

- 5 The present invention relates to a method for control of a direct current motor in one or several fan units, each comprising a fan, which method comprises: generation of a control signal from a first control unit which is external in relation to the said fan unit; transmission of the said control signal to the said fan unit; reception of the transmitted control signal in the said fan unit;
- 10 interpretation of the said control signal in a second control unit which is arranged in association with the said fan unit; and generation, in the said second control unit, of a supply signal for the said direct current motor, on the basis of the control signal generated by the first control unit and received in the fan unit and on the basis of a supply voltage.

15

- The invention also relates to an arrangement for controlling a direct current motor in a fan unit, which arrangement comprises a first control unit, which is external in relation to the said fan unit, a communication link between the said first control unit and the said fan, a second control unit arranged in
- 20 association with the said fan unit and arranged to generate a supply signal for the said direct current motor, on the basis of a control signal generated by the first control unit and transmitted via the said communication link, and on the basis of a supply voltage.

- 25 The invention also relates to a method for controlling a direct current motor for a fan arranged for ventilation of a vehicle seat.

The invention also relates to an arrangement for ventilating a vehicle seat, which arrangement comprises a fan, a direct current motor and a control unit.

30

## BACKGROUND ART:

Nowadays, for reasons associated with comfort and safety, seats in vehicles are ventilated. For this purpose, both the driver's seat and other seats in a vehicle can be provided with ventilation ducts that lead from a fan located in the vicinity of the seat to one or several openings in the seat. Such openings  
5 are normally located in the seat cushion, but can also be located in the seat back. The fan can be arranged so that it either blows air or extracts air. In this way, ventilation of the surface of the vehicle seat is achieved, which in turn gives the driver or passenger sitting on the seat in question an increased feeling of comfort.

10

A problem with previously-known arrangements for forced ventilation of vehicle seats is the difficulty in obtaining an accurately controlled temperature at the surface of the seat. WO 02/06914 shows an arrangement for temperature control of a vehicle seat comprising a fan for ventilating the  
15 said seat.

This design does not, however, allow any precise control of the fan for obtaining as accurately controlled a temperature as possible at the surface of the seat.

20

In a general context, methods for controlling the speed of rotation and output of a direct current motor by means of pulse width modulation, abbreviated as PWM, are currently known. In pulse width modulation, the direct current motor is driven by a pulse train generated in an external control unit, which  
25 means that during the pulse train's positive live phases, the direct current motor is live, while during the dead phases of the pulse train, the direct current motor is dead. Thus, during a supply period, the direct current motor receives drive voltage from and including a rising edge up to and including a falling edge.

30

The best conditions have normally been achieved when the switching frequency of the pulse-modulated signal is considerably higher than the

speed of rotation of the motor, whereby the output of a conventional direct current supply is obtained. A theoretical rule of thumb for obtaining the correct switching frequency is that the switching frequency must be higher than  $1/T_a$  where  $T_a = L/R$  is the electrical time constant of the motor. Here L  
5 is the inductance of the motor and R is the internal resistance of the motor. Normally, switching frequencies are used that are within the approximate range 20 Hz – 200 kHz, which can mean that audible dissonance from the motor arises or that electrical interference arises caused by the pulse width modulation.

10

For brushless direct current motors, a position sensor is required; which informs the driving electronics about the phase angle of the rotor magnets in relation to the field magnets. The drive electronics apply current to the windings on the basis of the output signal from this sensor. This is called  
15 electronic commutation. A so-called Hall detector is normally used as the sensor for obtaining this commutating output signal.

The pulse width modulated supply is currently implemented in such a way that a direct current motor is supplied with a pulse train with a fixed  
20 frequency generated in an external control unit. By feeding back the speed of rotation to the control electronics, the width of the signals in this pulse train can be varied in such a way that the motor receives voltage for a shorter or longer time during each supply period. In this way, the speed of rotation and output of the direct current motor are proportional to the pulse width of the  
25 supply pulse.

Patent US 6381406 shows how a direct current motor for cooling electronic equipment is connected to a pulse width modulated signal. The direct current motor emits an output signal in the form of a feedback signal "TACH" that  
30 corresponds to the speed of rotation of the motor. This output signal "TACH" is compared with a reference signal "SYNCH" that corresponds to the

required speed of rotation. When "TACH" deviates from "SYNCH", the pulse width is adjusted so that "TACH" and "SYNCH" conform with each other.

Patent DE10009128 C1 shows a fan for the ventilation of vehicle seats,  
5 where a control unit integrated in the fan unit is supplied with control signals from an external control unit. In turn, the control unit integrated in the fan unit supplies the fan motor with drive voltage on the basis of the control information received. This drive voltage for the fan motor comes in to the control unit integrated in the fan unit via a separate supply lead for drive  
10 voltage.

A disadvantage of previously known general technology for direct current motors is that a large amount of cabling is required in order to achieve both the transmission of signals and the transmission of power. This is also  
15 associated with disadvantages associated with the need to use pulse width modulation with a high pulse frequency in order to avoid audible dissonance that originates from the pulse width modulated supply, as this gives rise to problems with electromagnetic interference, commonly given the abbreviation EMC (ElectroMagnetic Compatibility), caused by the high  
20 frequency of the switched signal.

#### DISCLOSURE OF INVENTION:

An object of the present invention is to provide an improved method and device for controlling a motor driven by direct current that do not have the  
25 disadvantages that are stated above and that can be equipped with a smaller amount of cabling in comparison with known technology.

This object is achieved by means of a method of the type described in the introduction, which method is characterized in that it also comprises the  
30 transmission of the control signal together with the supply voltage over a shared communication link, with the control signal being superposed on the supply voltage.

The object is also achieved by means of an arrangement of the type described in the introduction, which arrangement is characterized in that the communication link is arranged to transmit the supply voltage together with  
5 the said control signal.

It is also an object of the present invention to provide a method and a device for controlling a fan for the ventilation of a vehicle seat. This object leads to a more accurately controlled seat temperature for a vehicle seat.

10

This object is achieved by means of a method of the type mentioned in the introduction, which method is characterized in that it comprises control of the speed of rotation of the said direct current motor.

15 The object is also achieved by an arrangement of the type mentioned in the introduction, which arrangement is characterized in that the said control unit is arranged to control the speed of rotation of the said direct current motor.

The invention has certain advantages. Firstly, a flexible solution is obtained  
20 with effective coordination from a central control unit, and a complete fan control unit is obtained that receives control information from a central control unit. In addition, a low cost is achieved as a result of the two-wire control of the fan unit. In addition, a more controlled seat temperature is obtained for a vehicle seat as the speed of rotation of the fan is controlled in response to  
25 the temperature in question, and a more controlled seat temperature is obtained for a vehicle seat as a heating element is controlled in association with the said fan. An additional advantage of the invention is that it is possible to control the fan motor at very low speeds of rotation, which is particularly advantageous in vehicle seats, not least because the application  
30 requires relatively large motors (in order to be able to provide a high output), which are difficult to run at low output. This problem is solved by means of the invention.

**BRIEF DESCRIPTION OF DRAWINGS:**

The invention will be described in detail in the following, with reference to the attached drawings. These drawings are used only for illustrative purposes,  
5 and are not to be regarded as limiting the scope of the present invention. In the figures:

Figure 1 shows a perspective view of a vehicle seat in which the present invention can be utilized;

10 Figure 2a shows a pulse width modulated pulse train with a certain pulse width;

Figure 2b shows a pulse width modulated pulse train of the same type as in Figure 2a, but with increased pulse width;

15 Figure 3a shows an outline drawing of a fan unit according to the present invention, arranged with commutating feedback;

Figure 3b shows an outline drawing of a fan unit according to the present invention, arranged with feedback from a Hall detector; and

Figure 4 shows schematically a system according to an additional embodiment of the present invention.

20

**PREFERRED EMBODIMENTS:**

The present invention will now be described in greater detail, firstly with reference to Figure 1.

25 For increased comfort, the seat cushion 2 and seat back 3 of a vehicle seat 1 can be equipped for ventilation and temperature control of the surfaces or areas upon which a driver or passenger in the vehicle is expected to sit. In the following, the seat cushion 2 will be described, but a corresponding description can, of course, apply for the seat back 3. In a vehicle, both the

- driver's seat and the other seats can be equipped for ventilation by blowing or extraction of air. The blown or extracted air is distributed via at least one opening 4 that is arranged in the seat cushion 2. In the case of the blowing of air, this blown air is led through a duct 5 in the seat cushion 2 and out  
5 towards the person who is sitting on the seat in question, via the distributing opening 4. In the case of the extraction of air, this extracted air is led away from the person who is sitting on the seat in question through the duct 5 in the seat cushion 2 via the distributing opening 4.
- 10 The temperature control of the seat cushion 2 can be carried out in the form of cooling of the provided air, or alternatively by heating the seat cushion by means of a separate, electrically-heated heating element 6. The heating element 6 can, for example, consist of electrically conducting wires that are placed in the form of a heating loop 6 in the seat cushion 2. As the heating  
15 element 6 is connected to a current supply unit 7 which provides current, the heating element 6 can be heated up to a suitable temperature. The principle for temperature regulation using such a heating element 6 is already known and is therefore not described here in detail.
- 20 The blowing or extraction of air is preferably carried out using a fan 8 that is driven by a direct current motor. By regulating the speed of the fan 8, a particular quantity of air can be supplied to or taken from the seat cushion 2. In this way, a precisely regulated temperature can be obtained on the surface of the seat if a temperature sensor 9 arranged in the seat is arranged  
25 to communicate with a first control unit 10 for controlling the fan 8 via a first link 11, which first control unit 10 is external in relation to the fan 8. The fact that the first control unit 10 is external means that it is not arranged in the same physical casing or the like as the fan 8, but consists of a central control unit for the temperature control and ventilation of the seat 1 and is used for  
30 operating the heating element 6 and the fan motor 8.

The control of the speed of rotation of the fan 8 is preferably carried out by a supply of the pulse width modulation (PWM) type. By this means, the fan is supplied with a pulse train generated in the first control unit 10 via a second link 12, which means that the fan 8 is live during the positive live phases of the pulse train, while it is dead during the dead phases of the pulse train. Thus, during a supply period of the pulse width modulated supply, the fan 8 obtains drive voltage from and including the rising edge up to and including the falling edge. The supply can have a frequency that lies within the approximate range 20 Hz – 200 kHz, that is within a wide frequency range. It should, however, be noted that the invention is not limited to the supply having to be carried out at a certain particular frequency or within a certain particular frequency range.

If the temperature sensor 9 detects a temperature value that is such that the speed of rotation of the fan 8 should be increased, for example due to the detected temperature exceeding a predefined limit value, this is detected by the first control unit 10. This predefined limit value can, for example, depend upon a desired value that is set by the user. This desired value can either be linked to the temperature of the seat alone, or to the temperature of the vehicle in general, or to both these parameters. The first control unit 10 then increases the part of the pulse period when the fan is live. This corresponds to the duty cycle of the signal being increased. This is illustrated by graphs in Figure 2. Figure 2a and Figure 2b show the x-axis time  $t$  and the y-axis voltage  $U$ . Figure 2a shows a pulse train 13 for the pulse width modulated supply with the peak value  $V$  and the period of time  $T$  before the detected temperature exceeds the predefined limit value. Figure 2b shows a corresponding pulse train 14 for the pulse width modulated supply after the detected temperature has exceeded the predefined limit value and after the first control unit 10 shown in Figure 1 has increased the duty cycle of the pulse train, that is has increased the part of the pulse period  $T$  when the fan 8 is live. As a result, the fan 8 is supplied with greater power than previously, whereby the speed of rotation and the output of the fan 8 are increased. The



cooling of the seat 1 is thereby increased, which means that the detected temperature in the seat 1 drops. In a similar way, the part of the pulse period when the fan 8 is live is reduced when the detected temperature is less than a second predefined limit value that is also dependent upon the said desired value. There is, of course, a hysteresis between these limit values.

Thus, the first control unit 10 detects a temperature detected by the temperature sensor 9 and compensates by pulse width modulation in response to how this relates to a predefined limit value by changing the extent of time of the part of the pulse period when the fan 8 is live. This does not need to happen when certain predefined limit values are exceeded, but can be carried out continuously in accordance with a suitable algorithm for continuous control of the speed of rotation of the fan 8 on the basis of the temperature detected by the temperature sensor 9. It is not just the temperature that is measured by the sensor 9 that can constitute an input parameter for the regulation. The cab temperature and the humidity in the seat measured via other sensors (not shown), and the time and the user's selection of level for the fan can also constitute input parameters for the regulation. There can be separate functions for the temperature control and the ventilation outside or inside the first control unit 10, that is these functions do not need to be interconnected. The first control unit 10 varies continuously the part of the pulse period when the fan 8 is live in response to the temperature detected by the temperature sensor 9 in comparison with the said limit values.

In a preferred embodiment of the said invention, which is illustrated in Figure 1, the fan speed is regulated according to the above in combination with regulation of the power supplied to the said heating element 6 in the vehicle seat. Thus, in this case, the first control unit 10 regulates both the power supplied to the heating element and the pulse width in the pulse train associated with the pulse width modulated supply. The power supplied to the heating element is controlled by the first control unit 10 controlling the current

supply unit 7 via a third link 15, in response to the temperature in the vehicle seat 1 detected by the temperature sensor 9.

In an additional preferred embodiment with reference to Figure 3a, a fan unit  
5 43 is illustrated comprising feedback means, preferably via a commutator 17 arranged in the direct current motor 16 of the fan unit, which commutator can be either electronic or mechanical, which feedback means supply a feedback signal to a control unit (not shown in Figure 3a) for controlling the fan. This feedback signal is proportional to the speed of rotation of the fan. Detection  
10 of the speed of rotation of the fan can also, for example, be carried out by a so-called Hall detector 19, as shown in Figure 3b, or another known device for detecting the speed of rotation that supplies feedback values to the fan's control unit (not shown in Figure 3b), in a way that is analogous to what has been described above with reference to Figure 3a. Hall detectors are already  
15 known for detecting speed of rotation, and will therefore not be discussed in greater detail here. By this means, it is possible to monitor the speed of rotation of the fan continuously. This has several advantages. Among other things, it is possible to detect whether the bearings (not shown) of the fan 8 have become so worn that the speed of rotation of the fan 8 does not  
20 correspond to the power supplied, or whether the speed of rotation of the fan 8 is abnormal in some other way in relation to the power supplied. In particular, it is possible to synchronize the frequency of the pulse train of the pulse width modulated supply to the speed of rotation of the fan 8. By synchronization it is meant here that the frequency of the pulse width  
25 modulated supply is equal to the speed of rotation of the fan, or alternatively is a whole-number multiple or a whole-number fraction of the speed of rotation of the fan, or in general is related in a predetermined way to the speed of rotation of the fan. An advantage of this is that a relatively low frequency can be used for the pulse width modulated supply, while at the  
30 same time problems associated with dissonance and vibrations are reduced. Lower frequencies for the pulse width modulated supply means that simpler equipment can be used for generating the pulse width modulated supply,

while at the same time problems associated with electromagnetic compatibility caused by the high frequency of the switched signal are reduced. A precondition for this is that the first control unit 10 is equipped with means for regulating the frequency of the pulse train of the pulse width  
5 modulated supply.

Even if the fan unit 43 does not comprise the said feedback means 17, 19, a value for the speed of rotation of the fan 8 can be estimated on the basis of the appearance of the pulse width modulated supply at the relevant moment  
10 in time, so that the abovementioned regulation of the frequency of the pulse width modulated supply can be carried out on the basis of these estimated values.

A preferred embodiment for general control of direct current motors, in particular control of direct current motors in fans for ventilating vehicle seats, is illustrated in Figure 4. The figure shows a first fan unit 20 and a second fan unit 21, intended for separate vehicle seats in the same vehicle, which fan units 20, 21 are supplied in parallel. The first fan unit 20 is described below, but the second fan unit 21 has suitably an identical design and function. Note  
15 20 that the fan units 20, 21 can also be connected in series, and that both more than and fewer than the two fan units 20, 21 shown can be used for fan-cooling of the vehicle seats. The first fan unit 20 is equipped with means for communicating with an external control unit 22 corresponding to the abovementioned first control unit, for which reason it is also called here a first  
25 control unit. The first control unit 22 consists of a central air-conditioning control unit for one or several seats in a vehicle.

The first control unit 22 is constructed of a first micro-controller 23 and an interface circuit 24 that constitutes an interface for serial communication with  
30 the fan units 20, 21. In the embodiment that is illustrated in Figure 4, this drive circuit 24 consists of an IC of the MOSFET type. The first control unit

22 is also connected to a databus 25 for communication with other control systems (not shown) in the vehicle.

5 The fan unit 20 is also equipped with means for generating a supply signal to a direct current motor 30 in the fan unit 20, which supply signal consists preferably of a pulse width modulated signal (PWM signal). Other supply signals are also possible within the framework of the present invention, for example, via any type of known voltage regulator.

10 The fan unit 20 is here also equipped with means for controlling electronic commutation. These means are preferably contained in a second control unit 26, preferably constructed of a second microprocessor 27 in the said fan unit 20, with communication between the first control unit 22 and the second control unit 26 being carried out via a single cable 44 equipped for serial  
15 communication. In addition to the said signal cable 44, the said first control unit 22 and second control unit 26 have a shared earth lead 28.

The generation of the fan's supply signal is controlled by the first control unit 22, which communicates this controlling data signal in the form of a pulse  
20 train via the signal cable 44. In combination with this pulse train, the fan unit receives supply voltage via the signal cable 44. The pulse train has preferably a frequency that is partially dependent upon the characteristics of the seat. How low a frequency is suitable is limited by sound phenomena that arise, while how high a frequency is suitable is limited by tolerable  
25 electromagnetic interference levels. An example of a suitable frequency range is 50 Hz – 500 Hz, depending upon the speed of rotation of the motor. In this way, problems with EMC (ElectroMagnetic Compatibility) are reduced. The pulse train transmits data in the form of binary code, but other suitable data coding can also be used within the framework of the invention.

30

After the input 29 of the fan unit 20, the input signal is divided up so that it reaches both the fan's direct current motor 30 and the second control unit 26

comprised in the fan. At the supply input 31 of the direct current motor 30, there is a diode 32 and a stabilizing capacitor 33 with the task of maintaining the supply voltage for the direct current motor 30 irrespective of the appearance of the pulse train at the relevant moment in time. The diode 32 and the capacitor 33 also remove electrical interference that can prevent the second control unit 26 from reading the transmitted serial information. The nominally high level of the pulse train is thus at the same level as the supply voltage of the direct current motor 30. When the pulse train has a low level, it corresponds to the approximate earth level in the system. By this means, as mentioned above, the said capacitor 33 maintains the supply voltage so that the direct current motor 30 principally interprets the supply as a direct voltage supply.

At the signal input 34 of the second micro-controller 27, there is first a filter 35 in order that a filtered input signal can be obtained. Depending upon the time of the low level on the plus side of the filter or the data input, the second micro-controller 27 interprets this as a one or a zero. Thus one or several digital words are sent from the first control unit 22 to the second control unit 26, which digital words constitute an information train that is used as a control signal for the second control unit 26. On the basis of the control signal received from the first control unit 22, the second control unit 26 generates the pulse width modulated supply for controlling two commutating transistors 36, 37, whereby the speed of rotation and output of the direct current motor 30 are controlled by the second control unit 26 in response to the input signal received from the first control unit 22. Detectors 38 are arranged in the fan 20 for detecting the speed of rotation of the fan, which detectors are, for example, in the form of so-called Hall detectors. The control signal suitably defines digital words that indicate either how large a proportion of full motor output is to be utilized, or alternatively a precise value for a required speed of rotation of the fan. The control signal can, in addition, be coded with various types of protocol, which provide information that is intended to be transmitted with the control signal, for example comprising

addresses for the respective fans, commands for starting and stopping the respective fans, control information for the speed of the respective fans and data relating to other functions for control of the respective fans.

- 5 The second control unit 26 generates a pulse width modulated signal, intended for the said transistors 36, 37, with high frequency, preferably outside the audible frequency range, so that the fan unit 20 does not hereby generate dissonance in response to the pulse width modulated supply. An example of a suitable frequency range is from 20 kHz – 200 kHz. As a result  
10 of the high-frequency pulse width modulated supply only taking place inside the fan unit 20, EMC interference is kept at a relatively low level, as the fan unit 20 is relatively easy to screen against EMC. Alternatively, the previously mentioned solution where the pulse width modulated supply is frequency regulated in such a way that its frequency conforms to the speed of rotation  
15 of the direct current motor 30, can also be applied here.

- In addition, the second control unit 26 can be arranged to detect and communicate any faults that occur to the first control unit 22. If, for example, the speed of rotation that is detected by the Hall detectors 38 does not  
20 conform to the expected speed of rotation for a given pulse width modulated supply, an error signal is sent to the first control unit 22 for communication to the operator of the fan. If required, the supply to the fan is then also cut off. Communication of other information can also take place. The transmission of information is carried out by the second control unit 26 emitting a binary  
25 pulse train through the windings of the fan motor 30. This information can be communicated both when the fan motor is in motion and when it is stationary. The information can suitably be transmitted by current pulses being generated in the winding or windings of the direct current motor in accordance with a predetermined pattern. This pattern corresponds to  
30 certain information, for example corresponding to certain fault situations, or other types of operating state. In addition, this information can be used to

transmit identification information (serial number, type of item, etc) for the fan unit 20, so that the first control unit 22 is able to identify the fan unit.

5 In order for the fan units 20, 21 in Figure 3 to be able to be supplied with separate instructions concerning the required speed of rotation, they are provided with separate identities, so that instructions that are sent via the serial communication line 44 can be separated for each fan. This applies whether the fan units 20, 21 are connected in parallel to the first control unit 22 in accordance with Figure 3, or whether they are connected in series.

10

The information that is communicated to the respective fan unit 20, 21 can, in addition to the required speed of rotation, for example be how quickly the fan unit 20, 21 is to adapt to a new value, that is to say the rate of increase or reduction.

15

Figure 4 also shows schematically heating elements 39, 40 for the seat cushion and the seatback respectively, which heating elements 39, 40 are connected to the same first control unit 22 as the fan units 20, 21. Here the first micro-controller 23 arranged in the first control unit 22 communicates with the heating elements 39, 40 via an interface circuit 41. By this means, the fan units 20, 21 and the heating elements 39, 40 are controlled in such a way that they interact so that the driver or passenger sitting on the vehicle seat obtains the required temperature for the surface of the seat as quickly as possible. Figure 4 shows a temperature sensor 42 arranged in the seat cushion. This temperature sensor 42 communicates with the first control unit 22 via the said interface circuit 41.

20

25

It should be noted that the fan units 20, 21, that are described above and that are equipped with means 26 for serial communication with an external control unit 22 and means 26 for generating a pulse width modulated supply for the direct current motor 30 in the fan, can be used in all other situations where there is a need to control the speed of rotation and the output of a

30

direct current motor. The fans for ventilation of vehicle seats described here are only an example of a preferred embodiment of this control system.

- The invention is in no way limited to the embodiments described above, but
- 5 can be varied freely within the framework of the following claims. For example, the fan, which is equipped with an inbuilt micro-controller connected to an external control unit, can also be used in the embodiment with mechanical commutation.
- 10 The invention can be realized with different types of fan motor, that is with different numbers of phases and different types of connections. In addition to the motor type that is shown in Figure 4 in particular (with two transistors and two windings), the invention can utilize, for example, a motor with bridge-connected transistors in an H-bridge (which is known technology) or in some
- 15 other configuration.

In addition, it is the case that the control information that is transmitted between the external control unit 22 and the second control unit 26 can relate not only to the speed and power of the respective fan, but also to its

20 direction of rotation.



## CLAIMS

1. Method for controlling a direct current motor (30) in one or several fan units (43; 20, 21), each comprising a fan, which method comprises:
  - 5 generation of a control signal from a first control unit (22) which is external in relation to the said fan unit (43, 20, 21);
  - transmission of the said control signal to the said fan unit (43, 20, 21);
  - reception of the transmitted control signal in the said fan unit (43, 20, 21);
  - 10 interpretation of the said control signal in a second control unit (26) which is arranged in association with the said fan unit (43, 20, 21); and
  - generation, in the said second control unit (26), of a supply signal for the said direct current motor (30), on the basis of the control signal generated by the first control unit (22) and received in the fan unit and on the basis of a supply voltage; characterized in that the method further comprises:
  - 15 transmission of the control signal together with the supply voltage over a shared communication link (44), with the control signal being superposed on the supply voltage.
2. Method according to claim 1, characterized in that serial  
20 communication is used for transmitting the said control signal to the said fan unit (43, 20, 21).
3. Method according to claim 1 or 2, characterized in that the said  
25 control signal is a binary data signal.
4. Method according to claim 3, characterized in that the said control signal constitutes a measurement of a certain required proportion of the maximal output of the said direct current motor (30) or a certain required speed of rotation of the direct current motor's (30) fan.

5. Method according to any one of the preceding claims, characterized in that the said fan unit (43, 20, 21) is used for ventilation of a vehicle seat (1).
- 5 6. Method according to any one of the preceding claims, characterized in that pulse width modulation (PWM) is used for controlling the said direct current motor (30).
7. Method according to claim 6, characterized in that the pulse  
10 frequency of the said pulse width modulated supply is varied in response to a detected speed of rotation of the said direct current motor (30).
8. Method according to claim 6 or 7, characterized in that the pulse  
15 frequency of the said pulse width modulated supply is equal to or a whole-number multiple or a whole-number fraction of the detected speed of rotation.
9. Method according to any one of the preceding claims, characterized in that information is communicated from the fan unit  
20 (43, 20, 21) to the first control unit (22).
10. Method according to claim 9, characterized in that the said information is communicated via the windings of the direct current motor comprised in the fan unit (43, 20, 21).  
25
11. Method according to claim 10, characterized in that it comprises generation of current pulses in a predetermined pattern in the windings of the direct current motor, which pattern corresponds to certain information.
- 30 12. Method according to any one of claims 9-11, characterized in that the said information comprises data relating to operating state, fault diagnosis or identification information relating to the fan unit (43, 20, 21).

13. Method according to any one of the preceding claims, characterized in that each fan unit (43, 20, 21) is provided with an identity to make it possible to transmit information between the first control  
5 unit (22) and one of several fan units (43, 20, 21).

14. Method according to claim 13, characterized in that it comprises coding of the said control signal in a way such that it reflects information about the said identity.

10

15. Method according to any one of the preceding claims, characterized in that the first control unit (22) regulates both the fan unit(s) (43, 20, 21) and the heating element(s) (39, 40).

15 16. Arrangement for controlling a direct current motor (30) in a fan unit (43, 20, 21), which arrangement comprises:  
a first control unit (22) that is external in relation to the said fan unit (43, 20, 21);  
a communication link (44) between the said first control unit (22) and the said  
20 fan unit (43, 20, 21);  
a second control unit (26) arranged in association with the said fan unit (43, 20, 21) and arranged to generate a supply signal for the said direct current motor (30) on the basis of a control signal generated by the first control unit (22) and transmitted via the said communication link (44) and on the basis of  
25 a supply voltage;  
characterized in that the communication link (44) is arranged to transmit the supply voltage together with the said control signal.

17. Arrangement according to claim 16, characterized in that the  
30 said communication link (44) is also arranged for serial communication.

18. Arrangement according to claim 16 or 17, characterized in that the said control signal is a binary data signal.

19. Arrangement according to any one of claims 16-18,  
5 characterized in that the said fan unit (43, 20, 21) is arranged for ventilation of vehicle seats (1).

20. Arrangement according to any one of claims 16-19,  
characterized in that the said fan unit (43, 20, 21) also comprises  
10 means (17, 19, 38) for detecting speed of rotation.

21. Arrangement according to any one of claims 16-20,  
characterized in that the said fan unit is arranged for control of the  
speed of rotation of the direct current motor (30) by means of pulse width  
15 modulation.

22. Arrangement according to any one of claims 16-21,  
characterized in that the said second control unit (26) is arranged  
internally in relation to the said fan unit (43, 20, 21).  
20

23. Arrangement according to any one of claims 16-22,  
characterized in that it comprises at least two fan units (43, 20, 21) that  
are connected either in series or in parallel.

24. Arrangement according to any one of claims 16-23,  
characterized in that it comprises a circuit with a diode (32) and a  
capacitor (33) that are utilized when supplying the said control signal to the  
direct current motor (30) while the supply voltage to the direct current motor  
(30) is maintained.  
25

30

25. Method for controlling a direct current motor (30) for a fan (8)  
arranged for ventilation of a vehicle seat (1), characterized in that the

method comprises controlling the speed of rotation or the output of the said direct current motor (30).

26. Method according to claim 25, characterized in that pulse width modulation (PWM) is used for the said control of the direct current motor (30).

27. Method according to any one of claims 25 or 26, characterized in that the pulse frequency of the said pulse width modulated supply is varied in response to the detected speed of rotation.

28. Method according to any one of claims 25-27, characterized in that the second control unit (26) generates an additional pulse width modulated signal intended for supplying the windings of the direct current motor (30).

29. Method according to claim 28, characterized in that the said additional pulse width modulated signal is variable.

30. Arrangement for ventilating a vehicle seat, which arrangement comprises a fan (8), a direct current motor (16, 30) and a control unit (10, 22), characterized in that the said control unit (10, 22) is arranged to control the speed of rotation of the said direct current motor (16, 30).

31. Arrangement according to claim 30, characterized in that the said speed of rotation is controlled by the said control unit (10, 22) in response to external stimuli.

32. Arrangement according to claim 31, characterized in that the said external stimuli consist of the output signal from a temperature detector (9, 42) arranged in the vehicle seat (1).

33. Arrangement according to any one of claims 30-32, characterized in that the said control of the speed of rotation of the direct current motor is carried out by means of a pulse width modulated supply.

5

34. Vehicle seat (1) characterized in that it is equipped with an arrangement according to any one of claims 16-24 or 30-34.

35. Method for diagnosis and control of a direct current motor (30) in a fan unit (43, 20, 21) with a fan, which method comprises:

10 a control unit (26) arranged in association with the said direct current motor (30) for controlling the speed of rotation or output of the said direct current motor (30), with

15 a supply signal for the said direct current motor (30) being received in the said control unit;

characterized in that the method comprises;

generation of a diagnostics signal from the control unit (26) arranged in association with the said direct current motor (30); and

20 transmission of the said diagnostics signal to an additional control unit (22) which is external in relation to the said fan unit (43, 20, 21).

36. Method according to claim 35, characterized in that the said diagnostics signal is transmitted in the form of a predetermined pattern in the current that is supplied to the windings of the said direct current motor (30).

25

1/3

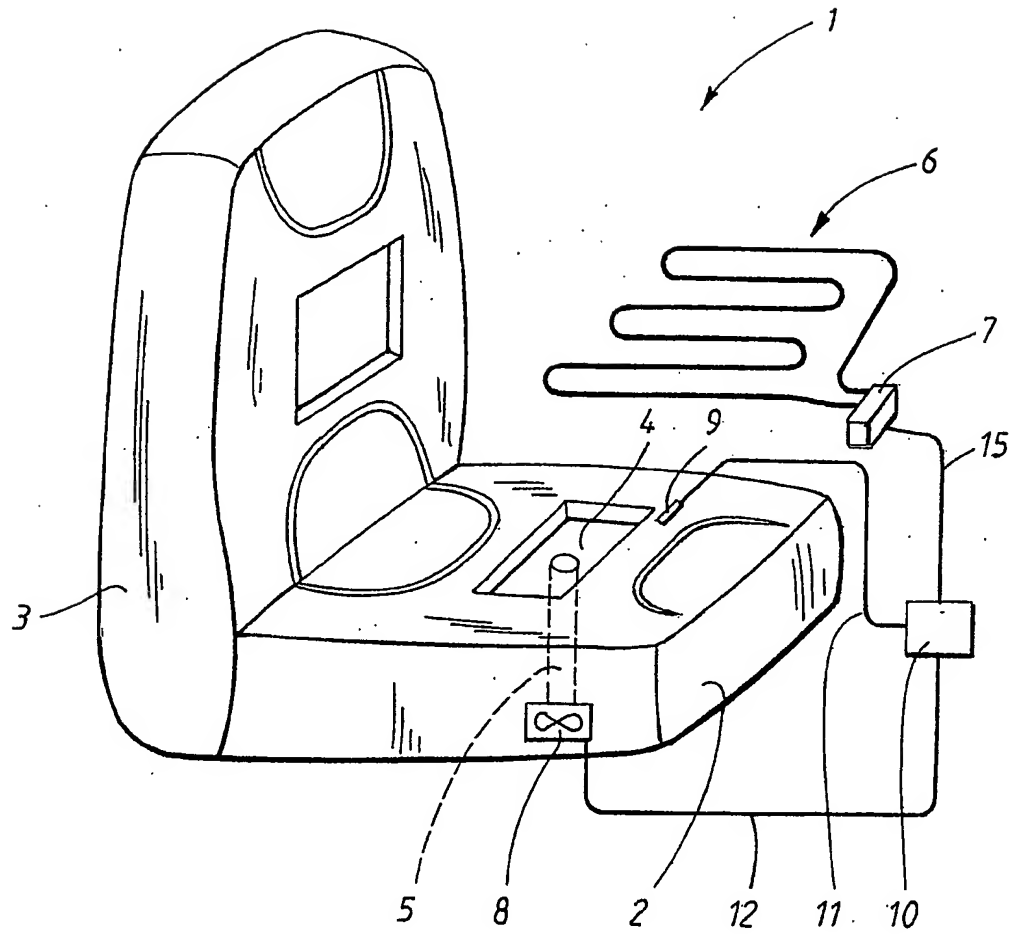


FIG. 1

2/3

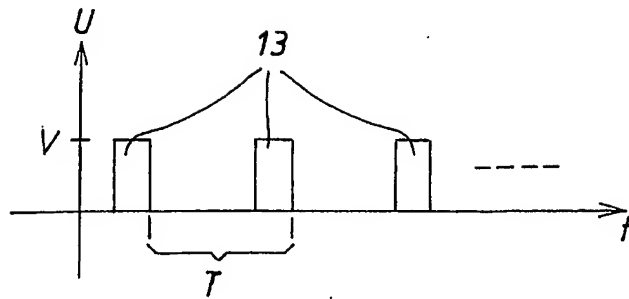


FIG. 2a

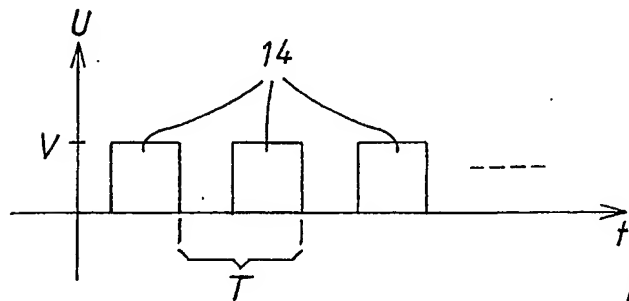


FIG. 2b

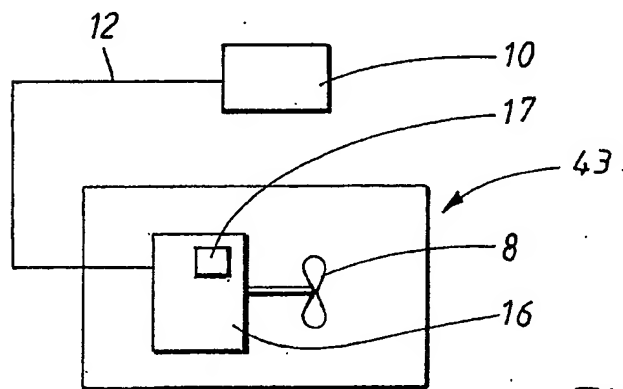


FIG. 3a

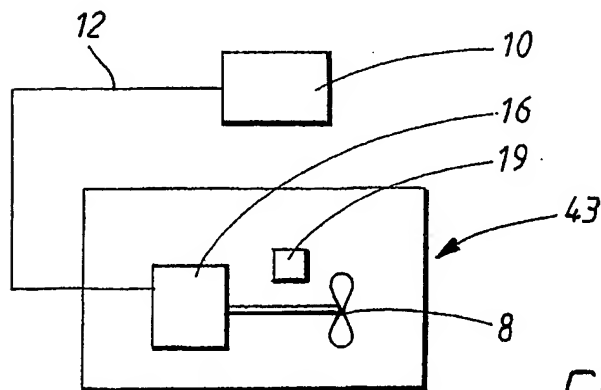


FIG. 3b



3 / 3

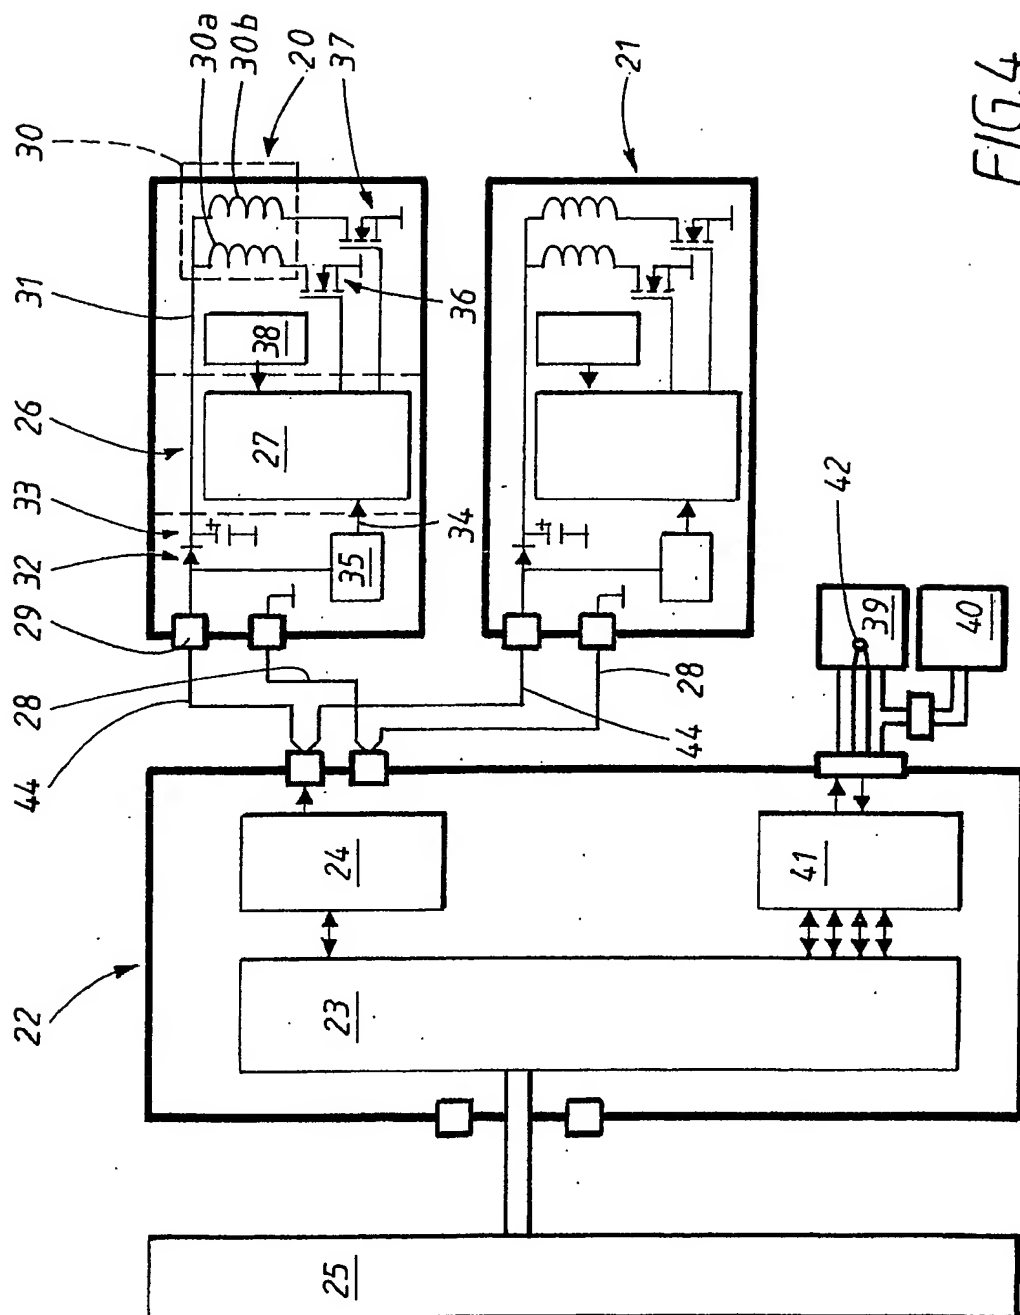


FIG. 4

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/SE 2004/001031

## A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H02P 5/17, B60N 2/56, B60H 1/24  
According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H02P, B60N, B60H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched  
SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI-DATA, EPO-INTERNAL, PAJ, INSPEC

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 0136230 A2 (INFINEON TECHNOLOGIES AG), 25 May 2001 (25.05.2001), page 1, line 10 - line 23; page 3, line 10 - page 4, line 21	1,16
Y	--	2-15,17-36
Y	US 6008603 A (STEVEN C. JONES ET AL), 28 December 1999 (28.12.1999), column 3, line 32 - line 54; column 4, line 15 - column 6, line 57	2-15,17-36
A	US 2001/028185 A1 (STEFAN STOWE ET AL) 11 October 2001 (2001-10-11) page 1 [0007] - [0013]	1-36
	--	

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

\* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

22 Sept 2004

Date of mailing of the international search report

28 -09- 2004

Name and mailing address of the ISA/  
Swedish Patent Office  
Box 5055, S-102 42 STOCKHOLM  
Facsimile No. +46 8 666 02 86

Authorized officer

Antonio Farieta /LR  
Telephone No. +46 8 782 25 00

# INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 2004/001031

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>US 6054823 A (JERRY COLLINGS ET AL), 25 April 2000 (25.04.2000), column 1, line 11 - column 3, line 35</p> <p style="text-align: center;">-- -----</p>	1-36

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 2004/001031

WO	0136230	A2	25/05/2001	DE	19955328 A,C	26/07/2001
US	6008603	A	28/12/1999	JP	2000134974 A	12/05/2000
US	6054823	A	25/04/2000	AP	1047 A	28/02/2002
				AP	9901504 D	00/00/0000
				AT	245158 T	15/08/2003
				AU	740664 B	08/11/2001
				AU	2741999 A	01/11/1999
				BG	104919 A	31/08/2001
				BR	9909565 A	19/12/2000
				CA	2327723 A	21/10/1999
				CN	1296488 T	23/05/2001
				CZ	20003738 A	12/12/2001
				DE	69909613 D,T	09/06/2004
				DK	1070069 T	06/10/2003
				EP	1070069 A,B	24/01/2001
				SE	1070069 T3	
				ES	2201677 T	16/03/2004
				HR	20000647 A	30/06/2001
				HU	0102094 A	28/11/2001
				ID	26089 A	00/00/0000
				IL	138631 D	00/00/0000
				JP	2002511471 T	16/04/2002
				NO	20005077 A	05/12/2000
				NZ	506805 A	30/05/2003
				OA	11497 A	06/05/2004
				PL	343522 A	27/08/2001
				PT	1070069 T	31/10/2003
				SI	1070069 T	00/00/0000
				SK	14902000 A	09/05/2002
				TR	200002953 T	00/00/0000
				TW	542839 B	00/00/0000
				US	6110964 A	29/08/2000
				WO	9952910 A	21/10/1999
				ZA	9902630 A	09/10/2000